

Jamesbury™ Wafer-Sphere™ butterfly valves for steam service

Wafer-Sphere high-performance butterfly valves are well suited for a wide range of steam applications. They are available in both lugged and wafer-style body designs. Sizes range from 2-1/2" – 60" (DN 65 – 1500) ASME Class 150, 3" – 36" (DN 80 – 900) Class 300 and 3" – 24" (DN 80 – 600) Class 600.

Wafer-Sphere valves offer a number of design features that make them the ideal choice for effective steam handling.

FEATURES

- New Xtreme™ seat provides longer life, expanded performance boundaries, and greater value.

Field-Proven Single-Piece Flexible PTFE Seat Design

- Lip-seal design compensates for temperature and pressure changes.
- No additional o-rings or metal parts required to maintain tightness.
- Tight shut-off in either direction.
- Longer service life with less maintenance.

Offset Shaft and Eccentric Disc

- No seat/disc contact in the open or intermediate position.
- Eliminates wear points at top and bottom of seats for higher cycle life
- Reduces torque requirements, allowing for smaller operators.



Easy Seat Maintenance

- Simply remove body insert and replace seat – disassembly of disc and shaft is not required.


Single- Source Responsibility

- Purchase valves, actuators, and accessories completely mounted from one source.

Seat Ratings


Seat ratings are based on differential pressure with the disc in the fully closed position and refer to seats only. Maximum body working pressures and test pressures of different materials are shown in the bulletins listed on the next page.

Type 815W and 815L valve seat ratings

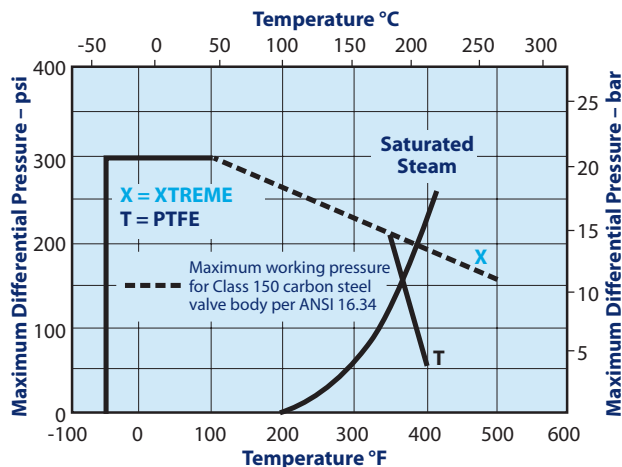

NOTE: 14" – 60" (DN 350 – 1500) valves equipped with 316 stainless or Alloy 20 shaft are rated for maximum differential pressure of 150 psi (10.3 bar).

Type 830W and 830L valve seat ratings

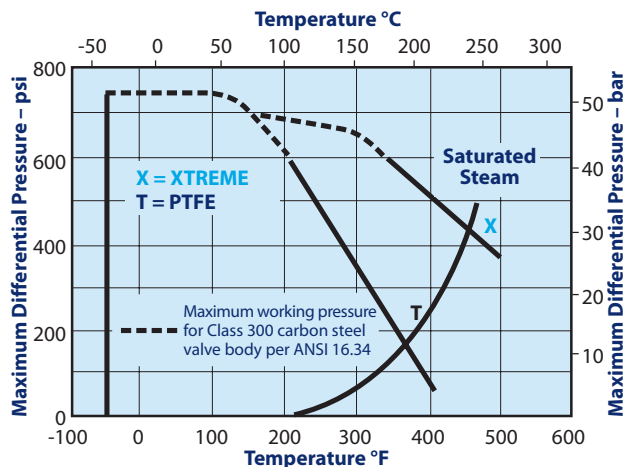


NOTE: Valves equipped with 316 stainless or Alloy 20 shaft are rated for maximum differential pressure of 300 psi (20.7 bar).

Saturated Steam Ratings

Series	Seat	Maximum Differential Pressure	
815W, 815L	Xtreme (X)	200 psi*	14 bar*
830W, 830L		450 psi	31 bar
860W, 860L		470 psi	32.4 bar

* Maximum rating of carbon steel body per ASME B16.34 at corresponding saturated steam temperatures. Valves may be derated based on shaft material selection.

- For throttling applications, Wafer-Sphere valves with an Xtreme seat are suitable for services with differential pressures as shown above, and throttling pressure drops as shown in Bulletin T150-3.

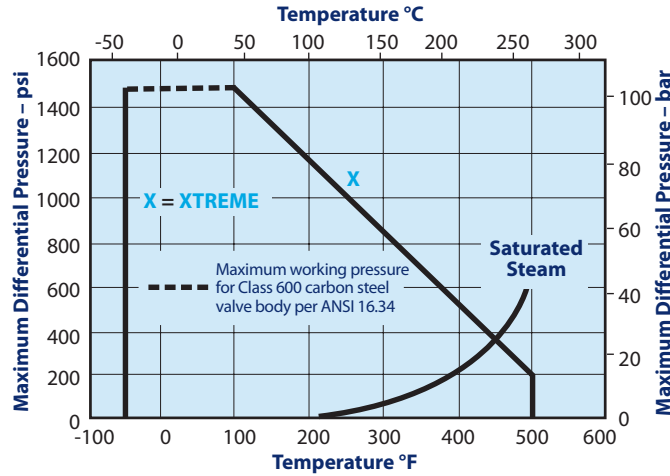

HOW TO ORDER

Refer to the following bulletins for ordering information, dimensions, bill of materials, and other specifications of Wafer-Sphere butterfly valves that are capable of filling a wide variety of steam service applications.

If Wafer-Sphere valves are to be used in piping systems where steam hammer can be a problem, the valves should be equipped with manual gear actuators instead of operating handles for more gradual valve operation.

- 2-1/2" – 60" (DN 65-1500) ASME Class 150 valves
- 3" – 36" (DN 80-900) ASME Class 300 valves
- 3" – 36" (DN 80-900) ASME Class 600 valves
- 30" – 60" (DN 750-1500) Series 835 Process-Rated Class 150 valves

- Bulletin**
- W101-6
 - W101-6
 - W104-1
 - W105-1

Distributed by:

DUNCAN CO

www.duncanco.com

612-331-1776

Subject to change without prior notice. Neles, Jamesbury and Easyflow by Neles, and certain other trademarks, are either registered trademarks or trademarks of Neles Corporation or its subsidiaries or affiliates in the United States and/or in other countries. For more information www.neles.com/trademarks

Neles

Vanha Porvoontie 229, 01380 Vantaa, Finland.
Tel. +358 10 417 5000.

neles.com

Reinventing
reliability