

Anderson Greenwood Instrumentation Block and Bleed Gauge Valves

Two-valve single outlet gauge valves that combine isolating, calibrating and venting facilities in a single compact unit

General Application

These valves enable gauges, pressure transmitters or switches to be installed and serviced reliably by reducing potential leak points. A threaded and plugged vent port enables safe installation of exhaust piping/tubing on hazardous service.



TECHNICAL DATA

Materials

CS, 316 SS, Monel®, duplex and other exotic materials

Seats:

Metal

Connections:

½" to 1" NPT; welded also available

Pressure (max):

M25: 6,000 psig (414 barg)

M251: 10,000 psig (690 barg)

Temperature (max):

M25: -313°F to 1000°F (-192° to 538°C)

M251: -70°F to 500°F (-57° to 260°C)

NOTE

Monel® is a registered trademark of Special Metals Corporation.

Features

- Compact design minimizes space requirements; low weight improves connection strength and reduces gauge whip.
- Minimal instrument installation components reduce costs and decrease possible leak points.
- Easy instrument check calibration using ¼" FNPT vent/test port.
- Ball end stem eliminates seat galling, provides bubble-tight shutoff and long life. Hardened, non-rotating ball ensures perfect alignment closure.
- Packing below threads prevents lubricant washout, thread corrosion, process contamination and eliminates galling.
- Easily adjustable packing decreases replacement down time and increases valve life.
- Safety back seating prevents stem blowout or accidental removal and provides a metal-to-metal secondary stem seal while in the fully open position.
- Dust cap prevents lubricant washout and protects bonnet assembly from contaminants.
- ENC plated 316 SS prevents galling or freezing of stem threads.
- Rolled stem, bonnet and male NPT threads provide additional strength.
- Mirror stem finish in the packing area enables smooth operation and extends packing life.
- Metal-to-metal body-to-bonnet seal in constant compression prevents bonnet thread corrosion, eliminates possible tensile breakage and gives a reliable seal point.
- Color coded caps for easy valve function identification.

M25/M251 SERIES

Anderson Greenwood Instrumentation Block and Bleed Gauge Valves


Bonnet Assembly Options

The M25 and M251 feature a metal-seated bonnet assembly which has a rotating stem with free swivel ball-type seat for long service life. The stem threads are rolled and lubricated to prevent galling and reduce operating torque. The stem seal is a PTFE or Graphite packing gland which is adjustable in service. A protective dust cap is fitted to contain stem lubricant and prevent the influx of contaminants. The specially hardened ball seat is ideal for both gas and liquid service. All bonnets are assembled with a bonnet locking pin to prevent accidental removal while in service.

The high pressure M251 bonnet assembly uses a strengthened stem and bonnet and is fitted with a larger size T-bar handle.


The M25 high-temperature bonnet assembly utilizes a similarly designed stem and bonnet, incorporating adjustable graphite rings and back-up pressure rings to ensure a leak-free stem seal.

Dimensions, inches [mm]

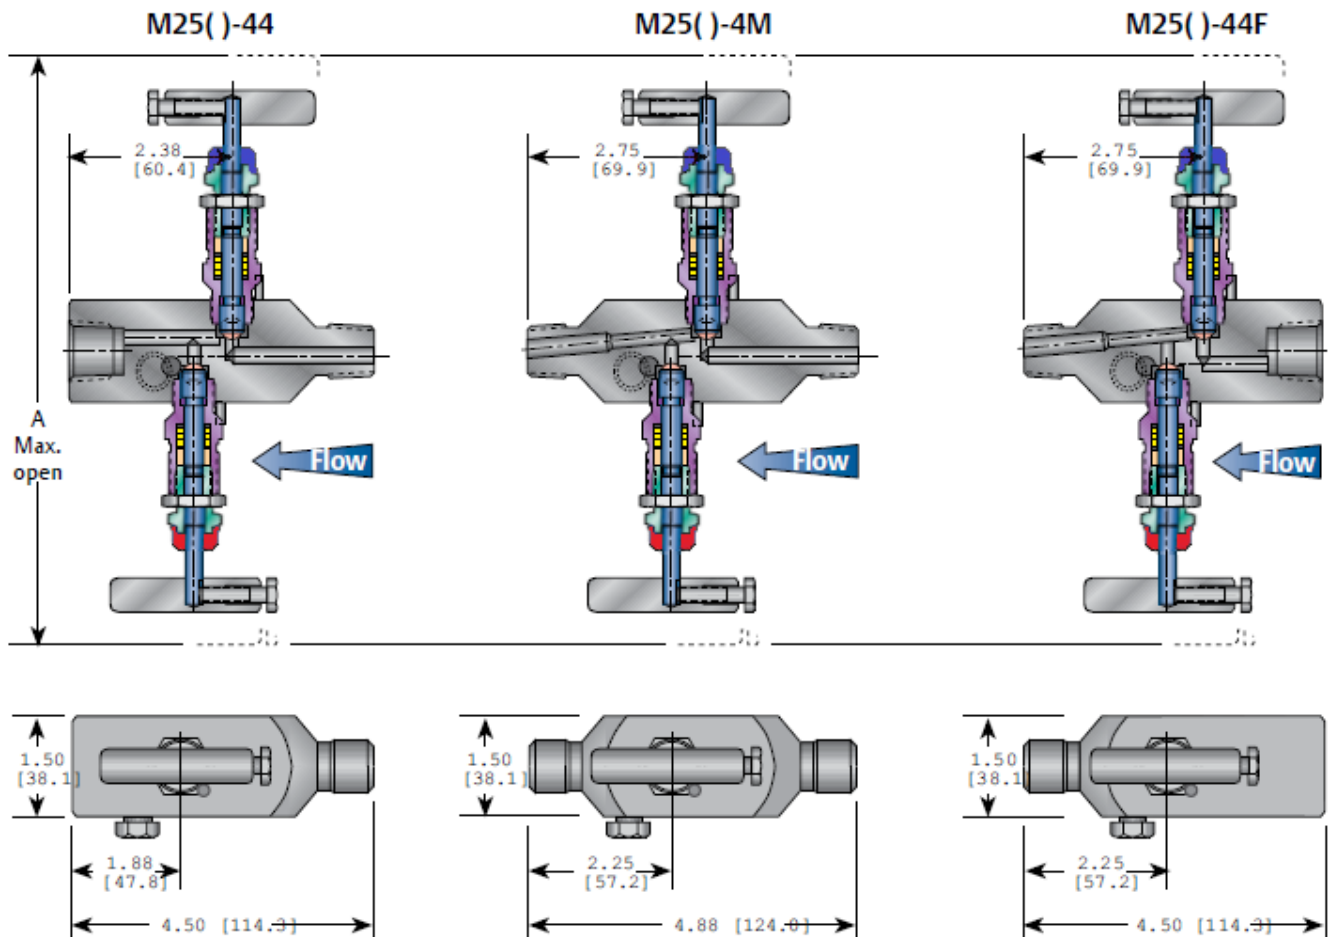

Anderson Greenwood Instrumentation Block and Bleed Gauge Valves

Bonnet Assembly Options

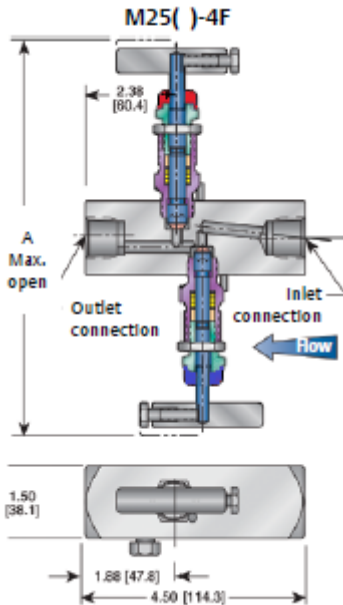


Dimensions, inches [mm]

Packing	A
Low emissions (E)	8.14 [206.75]
PTFE/Graphite	6.80 [172.72]
M251 only	6.84 [173.7]

NOTES

1. Approximate valve weight M25(-)44 and M25(-)44F 3.6 lb [1.63 kg].
M25(-)4M 3.8 lb [1.72 kg].
Valve Cv 0.52 maximum.
2. For Hastelloy® and SG3 call factory for dimensions and weights.
3. Contact factory for all other available configurations not shown above.




Standard Materials

Valve	Body	Bonnet	Stem	Ball	Packing
CS ^[1]	A105 CS	A108 CS	A276-316SS	17-4 PH	PTFE
CS ^[1]	A105 CS	A479-316SS	A276-316SS	17-4 PH	Graphite Low emissions Graphite
316 SS	A479-316 SS	A479-316 SS	A276-316 SS	316 SS	PTFE
316 SS	A479-316 SS	A479-316 SS	A276-316 SS	316 SS	Graphite Low emissions Graphite
SG ^[2]	A479-316 SS	A479-316 SS	Monel® 400	Monel® K500	PTFE
SG ^[2]	A479-316 SS	A479-316 SS	Monel® 400	Monel® K500	Graphite Low emissions Graphite
SG3 ^[3]	Hastelloy® C-276	Hastelloy® C-276	Hastelloy® C-276	Elgiloy®	PTFE
SG3 ^[3]	Hastelloy® C-276	Hastelloy® C-276	Hastelloy® C-276	Elgiloy®	Graphite Low emissions Graphite

NOTES

1. CS is zinc TCP plated to prevent corrosion.
2. SG (Sour Gas) meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions ≤ 50 mg/l (ppm)) and NACE MR0103-2005.
3. SG3 (Sour Gas) meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions > 50 mg/l (ppm)).

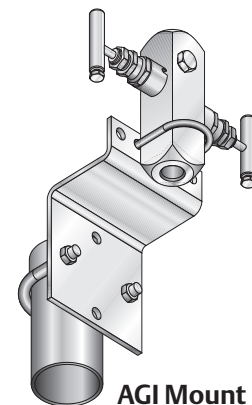

AGI Mount

The M25 and M251 are available with the AGI Mount option, which provides secure mounting, instrument piping stability and easy instrument removal for repairs, service and calibration.

M25/M251 SERIES

Anderson Greenwood Instrumentation Block and Bleed Gauge Valves

Pressure vs. Temperature


Pressure and Temperature Ratings

PTFE packing		
CS, 316 SS	6000 psig at 200°F [414 barg at 93°C]	4000 psig at 500°F [276 barg at 260°C]
316L SS	5000 psig at 200°F [344.7 barg at 93°C]	4000 psig at 500°F [276 barg at 260°C]
SG, SG3	6000 psig at 200°F [414 barg at 93°C]	4000 psig at 500°F [276 barg at 260°C]
Graphite low emissions graphite packing		
CS	6000 psig at 200°F [414 barg at 93°C]	1500 psig at 850°F [103 barg at 454°C]
316L SS	5000 psig at 200°F [344.7 barg at 93°C]	1500 psig at 850°F [103 barg at 454°C]
316 SS, SG, SG3	6000 psig at 200°F [414 barg at 93°C]	1500 psig at 1000°F [103 barg at 538°C]


NOTE

Minimum temperature for 316 SS M25 is -313°F (-192°C) @2500PSI (172 barg), M251 minimum is -70°F(-57°C)

Pressure vs. Temperature - M25

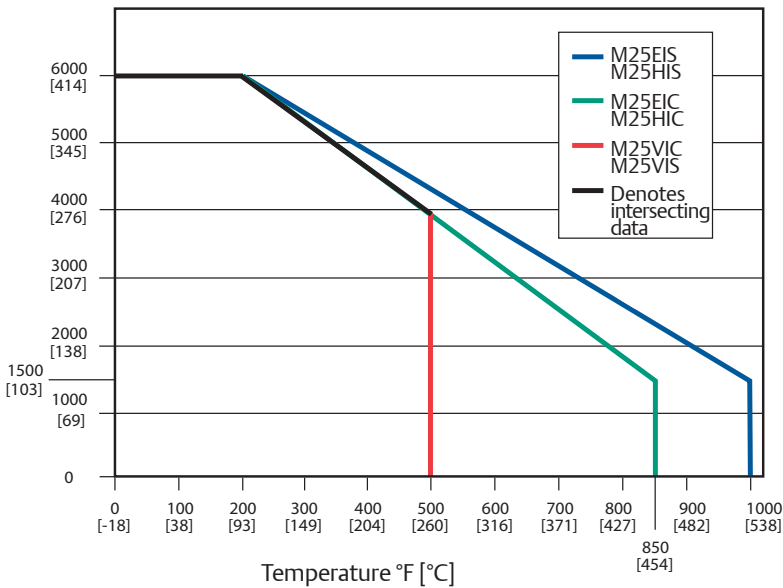

Pressure vs. Temperature - M251

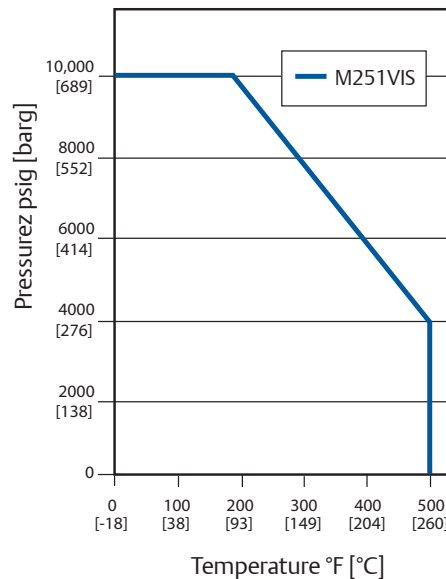


NOTE

M251 316L material has a maximum pressure rating of 9,000 psi.

Bonnet Lock (BL)

The Anderson Greenwood bonnet lock prevents accidental loosening of the bonnet-to-body seal. A high-strength, short bonnet pin aligns a hex collar over the bonnet.

Test indicate the minimum torque required to break the collar loose is greater than the torque required to twist off the handle.

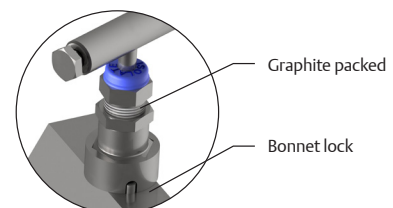

Anderson Greenwood Instrumentation Block and Bleed Gauge Valves

Selection Guide

M25	V	I	S	-44	C	-SG
BASIC SERIES	PACKING	SEAT MATERIAL	BODY MATERIAL ⁽¹⁾	CONNECTIONS ⁽²⁾	CONNECTION STYLE	OPTIONS
M25, M251	V PTFE (M251 only available in PTFE packing)	I Integral	C CS	4F ½-inch FNPT (outlet) x ¼-inch vent x ½-inch FNPT (inlet)	C Male plain end (CS is zinc coated)	HD Hydrostatic testing (100%) (MSS-SP-61)
	H Graphite		S 316 SS	4M ½-inch MNPT (outlet) x ¼-inch vent x ½-inch MNPT (inlet)		LAT Lockable anti tamper (PTFE Packing)
	E Low emissions Graphite		M Monel®	44 ½-inch FNPT (outlet) x ¼-inch vent x ½-inch MNPT (inlet)		MS Monel® stem
			J Hastelloy®	44F ½-inch MNPT (outlet) x ¼-inch vent x ½-inch FNPT (inlet)		NIC No India/China
			W 316L SS (maximum pressure 5,000 psig (345 barg) at 200°F (93°C))	46 ½-inch FNPT (outlet) x ¼-inch vent x ¾-inch MNPT (inlet)		OC00 Gaseous oxygen clean (OC)
				46M ½-inch MNPT (outlet) x ¼-inch vent x ¾-inch MNPT (inlet)		OC01 Liquid oxygen clean (OC)
			48 ½-inch FNPT (outlet) x ¼-inch vent x 1-inch MNPT (inlet)	PMI00 PMI Body Only		
			48M ½-inch MNPT (outlet) x ¼-inch vent x 1-inch MNPT (inlet)	PMI01 PMI Body and Bonnet		
			6 ¾-inch FNPT (outlet) x ¼-inch vent x ¾-inch FNPT (inlet)	PMI02 PMI Body, Bonnet and Stem		
			66 ¾-inch FNPT (outlet) x ¼-inch vent x ¾-inch MNPT (inlet)	SG SG (Sour Gas) meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions ≤ 50 mg/l (ppm)) and NACE MR0103-2005		
			68 ¾-inch FNPT (outlet) x ¼-inch vent x 1-inch MNPT (inlet)	SG3 SG3 (Sour Gas) meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions > 50 mg/l (ppm))		
				AM AGI Mount		
				AMS AGI Mount kit (stainless steel)		
	SST 316SS Tag Circular (10 Characters max)					
	BL Bonnet lock device					
	LT Low Temperature Bonnet 316SS M25 only					

NOTES

- For other body materials, consult factory.
- Consult factory for other optional connections.
- M251 not available in graphite.

M25/M251 SERIES

Anderson Greenwood Instrumentation Block and Bleed Gauge Valves

Selection Guide - Power Industry Applications ^[1]

M25 HP	S	-44	C	-XP	
BASIC SERIES	BODY MATERIAL	CONNECTIONS (INLET/OUTLET)	CONNECTION STYLE	OPTIONS	
M25 HP	S 316 SS, A479-316	4F	C Male plain end (CS is zinc coated)	PMI00	PMI body only
		4M		XP	ASME B31.1 (see note 1)
		44		AM	AGI Mount
		44F		AMS	AGI Mount kit (Stainless steel)
		46			
		46M			
		48			
		48M			
		6			
		66			
68					

NOTES

- All Power M25HP Gauge Valves come standard with Graphite packing, integral seats, bonnet locks, and are subjected to hydrostatic testing.
- SS ratings
6000 psig at 100°F [414 barg at 38°C]
3030 psig at 1000°F [201 barg at 538°C]

Distributed by:  Ph: 612-331-1776
www.duncanco.com